



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>A61M 25/00, 25/10, A61B 5/107</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/64524</b> <b>(43) International Publication Date:</b> 2 November 2000 (02.11.00)
<p><b>(21) International Application Number:</b> PCT/US00/11194</p> <p><b>(22) International Filing Date:</b> 26 April 2000 (26.04.00)</p> <p><b>(30) Priority Data:</b>          09/300,238                      27 April 1999 (27.04.99)                      US</p> <p><b>(71) Applicant (for all designated States except US):</b> AMERICAN MEDICAL SYSTEMS, INC. [US/US]; 10700 Bren Road West, Minnetonka, MN 55343 (US).</p> <p><b>(72) Inventor; and</b>  <b>(75) Inventor/Applicant (for US only):</b> BOUCHIER, Mark, S. [US/US]; 10280, 222nd Street East, Lakeville, MN 55044 (US).</p> <p><b>(74) Agent:</b> INSKEEP, James, W.; Oppenheimer Wolff &amp; Donnelly LLP, Suite 3800, 2029 Century Park East, Los Angeles, CA 90067-3024 (US).</p>		<p><b>(81) Designated States:</b> AU, CA, JP, MX, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b>  <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p><b>(54) Title:</b> CAVITY MEASUREMENT DEVICE AND METHOD OF ASSEMBLY</p> <div data-bbox="365 1129 1218 1472" data-label="Image"> </div> <p><b>(57) Abstract</b></p> <p>A design and method of manufacture are disclosed for a cavity measurement device used during surgical procedures. The cavity measurement device includes an inflation tube assembly comprising an elongated tube having a distal end and a proximal end and a balloon mounted at the distal end of the elongated tube. The elongated tube and the balloon comprise dissimilar materials and include an adhesive free seal between the elongated tube and the balloon. The inflatable balloon is inserted into a cavity and inflated with a volume of fluid, whereby the balloon volume represents the cavity volume. The mechanical attachment of the balloon onto the tube is substantially leakproof and has an attachment strength greater than the balloon material tensile strength. The mechanical attachment of the present invention substantially eliminates the potential for bond separation and preparatory operations typically associated with adhesive bonds.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## CAVITY MEASUREMENT DEVICE AND METHOD OF ASSEMBLY

Field of the Invention

The present invention relates generally to a cavity measurement device used during surgical procedures and a method of assembling a cavity measurement device. The present invention particularly relates to inflation tubes with a balloon used during surgery and methods of attaching a balloon to an inflation tube.

Background of the Invention

The main structural support of the human skeleton is the spine which is the bone structure that extends from the base of the skull to the pelvis. It includes a spinal cord which is approximately eighteen inches in length and comprised of nerves that carry impulses to and from the brain to the rest of the body.

Surrounding the spinal cord are pairs of rings of bone called vertebrae which constitute the spinal column (back bones) and each pair of vertebrae is connected by a flexible joint that stabilizes the vertebrae and allows the spine to move.

An "intervertebral disk" - or simply the "disk" - is located between each pair of vertebrae within the flexible joint and bears most of the compressive load of the spinal column. Each disk is a flat, circular capsule approximately one inch in diameter and has an outer layer or membrane which is strong and flexible and comprised of a fibrous cartilage called the annulus fibrosis. It also has an inner core which consists of a soft, gelatinous substance called the nucleus pulposus. The main function of the disk is to cushion the vertebrae during movement.

The structure of the human spine is designed for an upright position, a typical posture for humans throughout history, where walking, running, hunting, gathering, working on farms or at workbenches were common body motions and positions. Today, a high proportion of people lead sedentary lives, spending the better part of each day sitting behind desks writing patent applications, at work stations, in automobiles, etc. These changes in human behavior overtime, mainly resulting from technological advances, have had a profound and largely negative impact on human physiology, and particularly the spine. As a result, spine or back problems are the most common physical complaints among adults.

Everyday physical stresses and the normal aging process also adversely affect the human spine. In that connection, one of the most common back problems experienced by adults results from degenerative disk disease, a general term applied to degeneration of the

intervertebral disks. As the body ages, the disk material loses its elasticity and hardens, developing a consistency similar to a piece of hard rubber.

A specific example of degenerative disk disease is a herniated disk which is a condition resulting from strain or injury to the disk that causes the inner material of the disk to swell or  
5 herniate and the outer layer to rupture. When the disk ruptures, the inner material bulges and presses against, or pinches, the spinal nerves, resulting in severe pain.

When the disk degenerates to the point where it no longer properly functions, the disk is removed during a procedure called a discectomy. A discectomy involves removal of the ruptured or diseased disk from its location between adjacent vertebrae. By removing the disk  
10 and any associated disk or bone fragments, the source of the pressure on the spinal nerve is also removed, thereby relieving the pain.

Following a discectomy, the adjacent vertebrae may be fused together, resulting in partial loss of spinal flexibility. On the other hand, a bone graft or other specialized material, such as a prosthetic intervertebral implant, may be placed in the empty disk space in order to  
15 stabilize the vertebrae.

Bone grafts and similar prosthetic implants used following discectomy require the implant and surrounding vertebrae to be shaped using precision drilling and shaving techniques in order to provide a proper fit with the implant. This type of surgical reconstruction is difficult and time-consuming and often still results in limited flexibility of the spine. As a  
20 result, synthetic intervertebral disk prostheses have been developed, such as those described in U.S. Patent No. 4,863,477. These synthetic prostheses are fabricated prior to performance of the surgery and are shaped during surgery to conform specifically to the shape of the disk space, thereby eliminating the tedious task of precision drilling and shaving techniques associated with bone implants. Moreover, these synthetic prostheses provide a resiliency that  
25 facilitates flexibility of the spine.

In order to ensure that the prosthetic incorporates the proper shape and volume for the target space, various measuring techniques have been proposed. These techniques include X-rays, magnetic resonance imaging (MRI), computed tomography (CT) scans and myelography, a radiological technique for viewing the spinal cord. These techniques, although quite useful,  
30 are not without certain drawbacks including high costs, potential adverse side effects and inherent measuring inaccuracies which result from a variety of factors, including high signal to noise ratios, limited two-dimensional images, and potential radiation exposure. Furthermore, these devices are expensive and require highly-skilled technicians to operate them properly.

As a result, practitioners and medical institutions have continually sought a lower cost and less complex method of obtaining the data necessary to fabricate a quality prosthetic. In particular, there is a desire to obtain low-cost yet highly accurate body cavity measuring device that can be used with minimal to no side effects. Such a device must be biocompatible, non-toxic and simple to use. Finally, such a device must be fabricated by a manufacturing method that is efficient, easy to implement and cost effective.

#### Objects and Summary of the Invention

In view of the foregoing, it is an object of the present invention to provide a cavity measurement device that addresses the drawbacks associated with prior art cavity measuring devices, yet meets the needs of the users.

A further object of the present invention is to provide a cavity measurement device that is biocompatible, non-toxic and simple to use.

A further object of the present invention is to provide a cavity measurement device that provides a leakproof attachment of an inflatable balloon to a tube or cannula.

A further object of the present invention is to provide a cavity measurement device that provides a leakproof attachment able to withstand a 45 psi balloon pressure during use.

A further object of the present invention is to provide a cavity measurement device that includes a mechanical attachment with an attachment strength greater than the balloon material tensile strength.

A further object of the present invention is to provide a method of making a cavity measurement device that is efficient, easy to implement and cost effective.

These and other objects not specifically enumerated herein are believed to be addressed by the present invention which contemplates a cavity measurement device that includes an inflation tube assembly comprising an elongated tube having a distal end and a proximal end and a balloon mounted at the distal end of the elongated tube. The elongated tube and the balloon comprise dissimilar materials and include an adhesive free seal between the elongated tube and the balloon.

The present invention also contemplates a method of assembling a cavity measurement device which may include the steps of attaching a silicone inflatable balloon having a tubular stem section and a bulbous section onto an elongated thermoplastic tube by sliding the stem section onto an end of the elongated tube and positioning a piece of heat-shrink tube over an area of the stem section that overlaps the elongated tube. The next steps may include shrinking the heat shrink tube and folding a length of the stem section over the heat-shrink tube. The following steps would include overlaying a compression tube onto an overtube so as to create

an overtube assembly and aligning the overtube assembly onto the stem section and a portion of the elongated tube. The next steps would likely include heating and subsequently cooling the overtube assembly, so that the compression tube molds the overtube onto the stem section and elongated tube. The final steps would include bonding an end of the overtube onto the  
5 elongated tube, thereby forming a mechanical, leakproof bond, and removing the compression tube.

#### Brief Description of the Drawings

Other features and advantages of the present invention will be seen as the following description of particular embodiments progresses in conjunction with the drawings, in which:

10 FIG. 1 is a perspective view of a cavity measurement device in accordance with a preferred embodiment of the present invention;

FIG. 2 is a second perspective view of a cavity measurement device in accordance with a preferred embodiment of the present invention;

15 FIG. 3 is a side perspective view of an inflatable balloon component of the cavity measurement device in accordance with a preferred embodiment of the present invention;

FIG. 4 is a cross-sectional view of an inflatable balloon taken along the lines 4-4 in FIG. 3;

FIG. 5 is a perspective view of an inflatable balloon attachment assembly in accordance with a preferred embodiment of the present invention;

20 FIG. 6 is a cross-sectional side view of a step of a method of assembling a cavity measurement device in accordance with a preferred embodiment of the present invention;

FIG. 7 is a cross-sectional side view of a step of a method of assembling a cavity measurement device in accordance with a preferred embodiment of the present invention;

25 FIG. 8 is a cross-sectional side view of a step of a method of assembling a cavity measurement device in accordance with a preferred embodiment of the present invention;

FIG. 9 is a cross-sectional side view of a step of a method of assembling a cavity measurement device in accordance with a preferred embodiment of the present invention; and

FIG. 10 is a cross-sectional side view of a step of a method of assembling a cavity measurement device in accordance with a preferred embodiment of the present invention.

#### Detailed Description of the Invention

30 Referring to Figure 1, an embodiment of a cavity measurement device 10 for use with a pistol-grip handle 12 or other similar device in accordance with the present invention includes an elongated inflation tube or cannula 14 and an inflatable balloon 16. The inflatable balloon

16 is mechanically affixed to one end of the elongated tube 14 and provides a leakproof attachment that can withstand a 45 psi balloon pressure. The other end of the elongated tube 14 connects to a balloon mount 18 that couples onto the trigger receptacle 20 of the handle 12.

Referring to Figure 2, an embodiment of the elongated tube 14 includes a distal end 22 and a proximal end 24. The distal end 22 of the elongated tube 14 connects to the inflatable balloon 16 and the proximal end 24 of the elongated tube 14 connects to the balloon mount 18 (not shown). The inner diameter of the elongated tube 14 should be large enough to adequately support a flow of fluid and is commonly between the range of 3-4 French. Since a portion of the elongated tube 14 is inserted into a body space, the outer diameter of the elongated tube 14 should be large enough to accommodate the flow of fluid in its inner diameter, yet small enough so as to be minimally invasive during a surgical procedure. A suitable outer diameter for the elongated tube 14 is about 7 French to 8 French.

The elongated tube 14 should be long enough so that a first section of the elongated tube 14 adequately fits into the trigger receptacle 20 (not shown) and the remaining section of the elongated tube 14 extends sufficiently beyond the trigger receptacle 20. For the cavity measurement device 10 of the present invention, the length of the elongated tube 14 is typically about 38 cm to 40 cm. The section of elongated tube 14 extending beyond the trigger receptacle 20 must be of optimal length, such as 20 cm, to allow a portion of the elongated tube 14 to be inserted into the body between the vertebrae of a spine during a disectomy or similar procedure.

Since a portion of the elongated tube 14 will contact the body, its material should be biocompatible and non-toxic. In a preferred embodiment, the material of the elongated tube 14 is a thermoplastic, such as polyethylene terephthalate (PET). Similar materials, such as nylon, may also be used.

The fabrication of the elongated tube 14 typically involves an extrusion process that provides precisely controlled inner diameters and wall-thicknesses. The particular configuration of the elongated tube 14 provides sufficient rigidity to withstand the forces and pressures exerted on it during a surgical procedure.

As shown in Figure 3, the cavity measurement device 10 of the present invention also includes an inflatable balloon 16. In a preferred embodiment, the inflatable balloon 16 is made of an elastic material, such as silicone, that is capable of being easily stretched or expanded and resuming its former shape. The preferred balloon 16 material is silicone because of its low durometer and high tear resistance (i.e. elongation at break), biocompatibility and non-toxicity. Silicone is also preferred due to its high elasticity and low modulus of elasticity which enables





dissimilar material characteristics of the inflatable balloon 16 and elongated tube 14. Such adhesives are typically unable to withstand the high pressures exerted on the bond by the inflatable balloon 16. In addition, the elasticity of the inflatable balloon 16 tends to be compromised by the rigid bond caused by chemical adhesives. As a result, such bonds have a tendency to separate or peel away when subject to various stresses and pressures encountered during surgical procedures.

As a result, in the present invention, a mechanical fixation method is used. The mechanical fixation provides a durable, leakproof attachment of the inflatable balloon 16 to the elongated tube 14 which, in a preferred embodiment is capable of withstanding a 45 psi balloon pressure and is greater than the balloon 16 material tensile strength. In addition, the use of a mechanical fixation method avoids pre-surface treatments, primers, cure times, or other preparatory operations typically associated with adhesive bonding methods.

Referring to Figure 5, the structure used to mechanically attach the balloon 16 to the tube 14 is shown and includes a heat-shrink tube 30 and an overtube 32. The heat-shrink tube 30 is used to mechanically attach the inflatable balloon 16 to the elongated tube 14. More specifically, the heat-shrink tube 30 is positioned onto a portion of the stem section 26 of the balloon 16 that is mounted onto the elongated tube 14. Heat is then applied to the heat-shrink tube 30 which causes it to shrink and conform to the size and shape of that portion of the stem section 26 and the elongated tube 14, thereby securing the stem section 26 to the elongated tube 14.

In a preferred embodiment, the heat-shrink tube 30 is made of polyvinylidene fluoride (PVDF). Alternatively, the heat-shrink tube 30 may be fabricated from other suitable heat-shrink materials, such as polyolefin and teflon.

The heat-shrink tube 30 is approximately 0.4 cm long, with an internal diameter of about 0.3 cm. The internal diameter of the heat-shrink tube 30 must be of sufficient size to allow the heat-shrink tube to fit, prior to heating, over the stem section 26 of the inflatable balloon 16 when it is mounted onto the elongated tube 14.

In addition to use of the heat shrink, an overtube 32 of the present invention is also used to assist in mechanically fixating the inflatable balloon 16 onto the elongated tube 14. A description of how the overtube 32 is utilized is set forth below. The overtube 32 also softens when subject to heat and is preferably made from polyethylene terephthalate (PET). Alternatively, the overtube 32 may be fabricated from nylon or other similar materials that are conformable when heat is applied.

In addition to the particular material attributes of the overtube 32, the dimensional configuration of the overtube 32 is also important in order to obtain the necessary mechanical bonding of the balloon 16 to the elongated tube 14. The inner diameter and length of the overtube 32 should be appropriately sized to allow the overtube 32 to surround and overlap the assembled heat-shrink tube 30, stem section 26 and a portion of the elongated tube 14. In a preferred embodiment, the length and inner diameter of the overtube 32 are 1.9 cm and 0.38 cm respectively.

Prior to use, the cavity measurement device 10 is primed by evacuating the air from the inflatable balloon 16 and elongated tube 14 and infusing a fluid therein. The fluids used during the priming procedure include, but are not limited to, water, saline and contrast media. It is important to note that these same fluids can also be used as inflation fluids when the device is inserted into a body cavity during a measurement procedure. The objective of the priming procedure is to remove any and all air from the inflatable balloon 16 and elongated tube 14 to ensure accurate volume measurements by the cavity measurement device 10. After the priming procedure is completed, the fluid is removed.

In use during a surgical procedure, such as measuring a disk space volume, the inflatable balloon 16, in a deflated state, is inserted into the disk space. Fluid is infused into the balloon 16 causing the balloon 16 to inflate and fill the disk space volume. The volume of fluid infused into the cavity measurement device 10 must attain a predetermined pressure within the disk space that is substantially equivalent to the normal anatomical pressures exerted on a natural intervertebral disk. The amount of fluid volume infused into the cavity measurement device is calculated and a prosthetic disk of equivalent volume is then selected for insertion into the disk space. A preferred prosthetic disk is a hydrogel disk, although other similar prosthetic disks may be used. When inserted into the disk space, the prosthetic disk conforms to the configuration of the cavity and fills the cavity with a sufficient volume of material to create appropriate pressures in the spine to support the body.

#### Method of Fabrication

The present invention also contemplates a method of fabricating a cavity measuring device and particularly contemplates a method of mechanical fixation of the inflatable balloon 16 onto the elongated tube 14 of the cavity measurement device 10, as shown in Figures 6-10. To keep the lumen of the elongated tube 14 open during the assembly procedure, a straight, rigid mandrel 33, preferably made from Nitinol wire, is inserted into the lumen. The mandrel 33 is approximately 1.04 mm in diameter and extends along the length, and slightly beyond the ends 22,24, of the elongated tube 14. The first step of assembling the device of the present

invention includes sliding the stem section 26 of the inflatable balloon 16 onto the distal end 22 of the elongated tube 14 such that the entire length of the stem section 26 is placed onto the elongated tube 14. In a preferred embodiment, the bulbous portion 28 of the inflatable balloon 16 does not contact and extends beyond the distal end 22 of the elongated tube 14. Therefore, the bulbous portion 28 of the inflatable balloon 16 abuts the distal end 22 of the elongated tube, thereby forming a junction between the stem section 26 and the bulbous portion 28.

The next step includes mounting a heat-shrink tube 30 onto an area of the stem section 26, as shown in Figure 6. Preferably, the inner diameter of the heat-shrink tube 30 is smaller than the outer diameter of the bulbous portion 28 and larger than the outer diameter of the stem section 26 of the inflatable balloon 16. The heat-shrink tube 30 is mounted onto the elongated tube 14 at the proximal end 24 of the elongated tube 14, advanced along the length of the elongated tube 14 and positioned on the stem section 26 of the inflatable balloon 16. In particular, the heat-shrink tube 30 is located on an area of the stem section 26 that allows a sufficient length of stem section 26 to extend beyond the heat-shrink tube 30 toward the proximal end 24 of the elongated tube 14. The length of stem section 26 extending beyond the heat-shrink tube 30 should preferably be greater than the overall length of the heat-shrink tube 30.

The heat-shrink tube 30 is secured onto the stem section 26 using heat which causes the tube 30 material to contract and conform to the shape of the object it surrounds namely, the balloon 16 and the tube 14. After the heat is removed, the heat-shrink tube 30 retains its newly conformed shape, as shown in Figure 6, and forms a uniform thickness and contact surface with the stem section 26. In addition, the diminished inner diameter size of the heat-shrink tube 30 presses upon the outer diameter of the stem section 26, forming a mechanical fixation.

After shrinking the tube 30 onto the elongated tube 14, the length of the stem section 26 of the balloon 16 that extends past the heat shrink tube 30 toward the proximal end 24 of the elongated tube 14 is folded over the heat-shrink tube 30. In a preferred embodiment, the folded portion of the stem section 26 completely overlaps and partially extends beyond the distal end of the heat-shrink tube 30, as shown in Figure 7, so that a secure fixation is formed.

As shown in Figure 8, an overtube 32 and a compression tube 34 are then introduced in the form of an overtube assembly. The compression tube 34 is preferably made of silicone, however other similar materials may be used.

In particular, the overtube assembly includes a compression tube 34 with an overtube 32 located internally of the compression tube 34. The overtube assembly is made by radially expanding the compression tube 34 using a flow of fluid, such as air, to increase the inner

diameter of the compression tube 34. The overtube 32 is then inserted in the lumen of the compression tube 34 and the flow of fluid is discontinued so that the inner surface of the compression tube 34 uniformly contacts the outer surface of the overtube 32 but remains expanded (due to the overtube 32) beyond its otherwise unstressed configuration.

5           The overtube assembly is next positioned over the stem section 26 of the balloon and a portion of the elongated tube 14 such that the distal end of the overtube assembly is aligned with the junction formed by the elongated tube 14 and the bulbous portion 28 of the inflatable balloon 16. A portion of the overtube assembly extends beyond the stem section 26 toward the proximal end of the elongated tube 14.

10           After the overtube assembly is properly aligned onto the stem section 26 and elongated tube 14, heat is applied to the assembly which causes the overtube 32 to soften. In its softened state, the overtube 32 offers less radial resistance to the compression force exerted by the compression tube 34 thereby allowing the compression tube 34 to compress and conform the overtube 32 to the configuration of the stem section 26 and elongated tube 14, as shown in  
15   Figure 9. After the heat is removed and the assembly allowed to cool, the overtube 32 remains in its conformed configuration, thereby forming a mechanical fixation that further secures the fixation formed by the balloon and the heat shrink tube 30. In a preferred embodiment, the inner surface of the overtube 32 uniformly contacts the outer surface of a portion of the elongated tube 14 and the entire length of the stem section 24 of the inflatable balloon 16.  
20   Although the compression tube 34 has now been allowed to return to its substantially unexpanded state, it remains on the assembly and is used to mask and protect the overtube 32 from the hot dyes used during the melt bonding process discussed below.

          The final assembly step includes securing a proximal end of the overtube 32 onto the elongated tube 14 by melt bonding the proximal end of the overtube 32 onto the elongated tube  
25   14 thereby forming a clamp bond as shown in Figure 10. The clamp bond secures the overtube 32 to the elongate tube 14 and prevents the overtube 32 from slipping off of the elongate tube 14 during use of the device. In addition, the clamp bond also creates a mechanical, leakproof barrier between the overtube 32 and the elongated tube 14. After the overtube 32 is firmly secured onto the elongated tube 14 and stem section 26 of the inflatable balloon 16, the  
30   compression tube 34 and mandrel 33 are removed.

          Although the invention has been described in terms of particular embodiments and applications, one of ordinary skill in the art, in light of this teaching, can generate additional embodiments and modifications without departing from the spirit of or exceeding the scope of the claimed invention. Accordingly, it is to be understood that the drawings and descriptions

herein are proffered by way of example to facilitate comprehension of the invention and should not be construed to limit the scope thereof.

What is claimed is:

1. An inflation tube assembly comprising:  
an elongated tube having a distal end and a proximal end;  
a balloon mounted at said distal end of said elongated tube;  
said elongated tube and said balloon comprising dissimilar materials; and,  
an adhesive free seal between said elongated tube and said balloon.
2. An inflation tube assembly as set forth in claim 1, wherein said elongated tube is a thermoplastic.
3. An inflation tube assembly as set forth in claim 1, wherein said balloon is a silicone.
- 5 4. An inflation tube assembly as set forth in claim 1, wherein said balloon includes a tubular stem portion and a bulbous portion.
5. An inflation tube assembly as set forth in claim 1, wherein said adhesive free seal includes a shrinkable tube encircling said balloon and said elongated tube.
6. An inflation tube assembly as set forth in claim 5, wherein said shrinkable tube is a  
10 polyvinylid fluoride.
7. An inflation tube assembly as set forth in claim 5, wherein said adhesive free seal further includes a secondary layer over said shrinkable tube.
8. An inflation tube assembly as set forth in claim 7, wherein said secondary layer includes a portion of said balloon layered over said shrinkable tube.
- 15 9. An inflation tube assembly as set forth in claim 7, wherein said adhesive free seal further includes an overtube surrounding said secondary layer and said shrinkable tube.
10. An inflation tube assembly as set forth in claim 9, wherein said overtube is a polyethylene terephthalate.
11. An inflation tube assembly as set forth in claim 5, wherein said shrinkable tube is  
20 sufficiently shrinkable to sealingly fixate said balloon to said elongated tube.
12. An inflation tube assembly as set forth in claim 9, wherein said overtube is meltable such that said overtube substantially conforms to said secondary layer and said shrinkable tube.

13. An inflation tube assembly as set forth in claim 1, wherein said adhesive free seal further comprises a melt bond between said overtube and said elongated tube.
14. A method of assembling a cavity measurement device comprising the steps of:  
attaching a silicone balloon having a tubular stem section and a bulbous portion onto an  
5 elongated tube by sliding said stem section onto a distal end of said elongated tube;  
positioning a heat-shrink tube over an area of said stem section overlapping said  
elongated tube;  
shrinking said heat-shrink tube;  
folding a length of said stem section over said heat-shrink tube;  
mounting an overtube assembly onto said stem section, said heat-shrink tube and said  
elongated tube;  
10 heating and subsequently cooling said overtube assembly whereby an overtube forms a  
mechanical attachment to said stem section, said heat-shrink tube and said elongated tube; and  
securing a proximal end of said overtube onto said elongated tube.
15. The method of assembling a cavity measurement device of claim 14 wherein said  
elongated tube is made of a thermoplastic.
16. The method of assembling a cavity measurement device of claim 15 wherein said  
15 elongated tube is made of polyethylene terephthalate.
17. The method of assembling a cavity measurement device of claim 14 further comprising  
the step of applying heat to said heat-shrink tube.
18. The method of assembling a cavity measurement device of claim 17 wherein said heat-  
shrink tube is made of polyvinylid fluoride.
- 20 19. The method of assembling a cavity measurement device of claim 14 further comprising  
the step of overlaying a compression tube onto said overtube and creating said overtube  
assembly.
20. The method of assembling a cavity measurement device of claim 14 wherein said  
overtube is made of polyethylene terephthalate.
- 25 21. The method of assembling a cavity measurement device of claim 14 wherein a distal  
end of said overtube assembly and said distal end of said elongated tube are aligned at said  
bulbous portion of said silicone balloon.

22. The method of assembling a cavity measurement device of claim 19 further comprising the step of removing said compression tube from said overtube.
23. The method of assembling a cavity measurement device of claim 14 wherein said mechanical attachment is leakproof.
- 5 24. The method of assembling a cavity measurement device of claim 23 wherein said mechanical attachment withstands a 45 psi balloon pressure.
25. The method of assembling a cavity measurement device of claim 23 wherein said mechanical attachment has an attachment strength greater than the balloon material tensile.



1/3

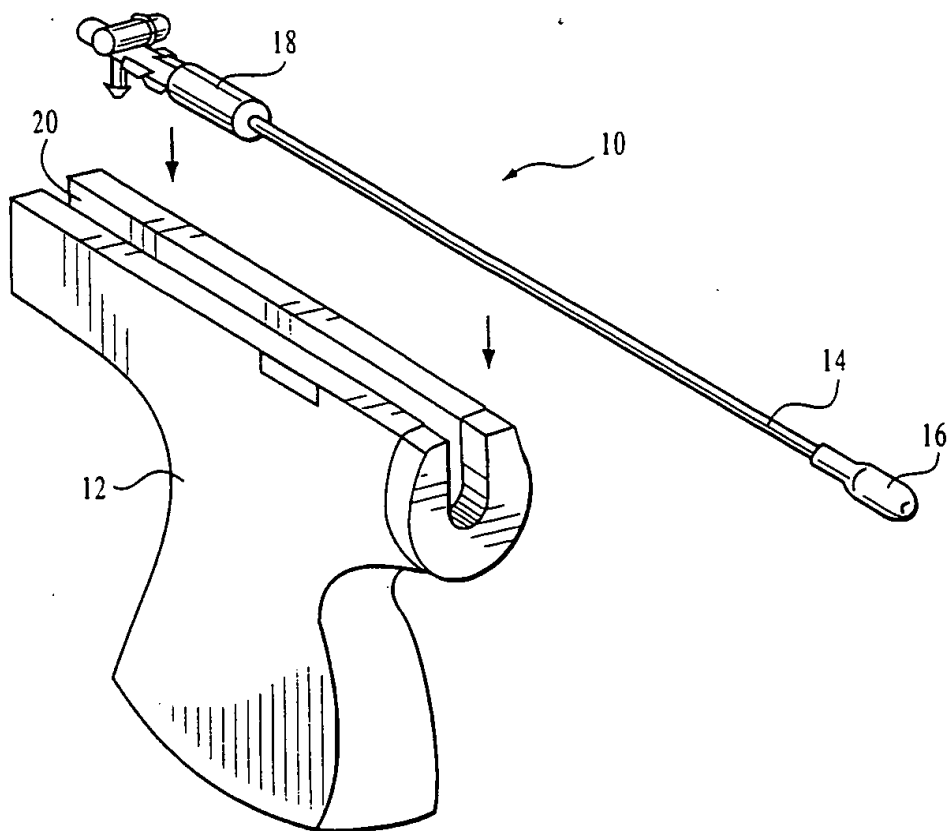


FIG. 1

2/3

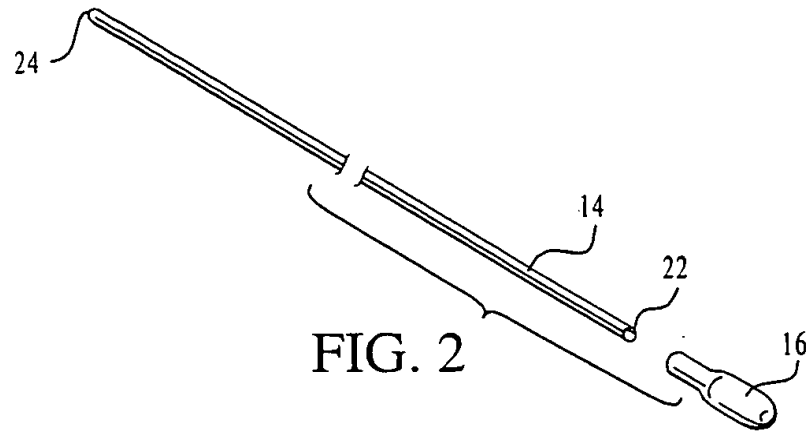


FIG. 2

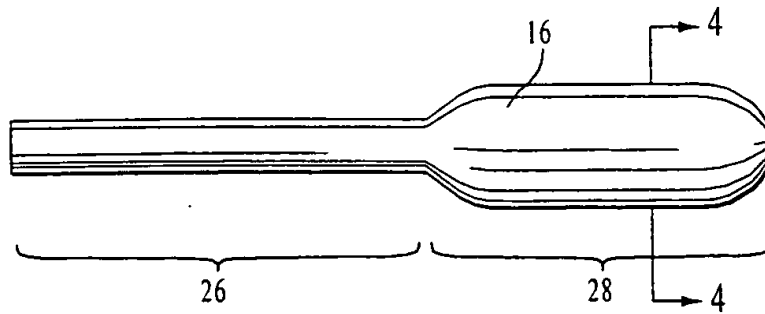


FIG. 3



FIG. 4

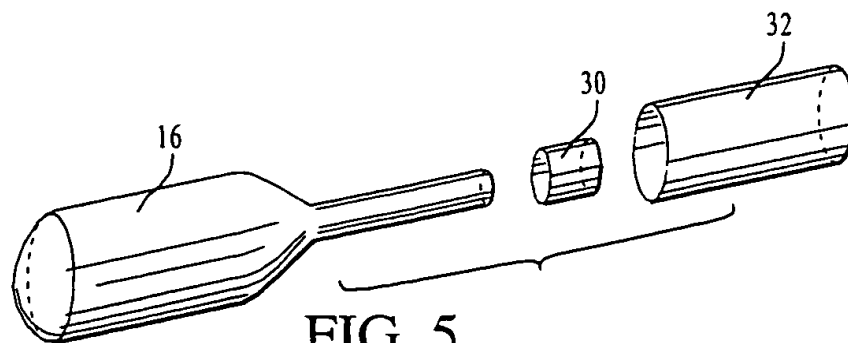


FIG. 5

3/3

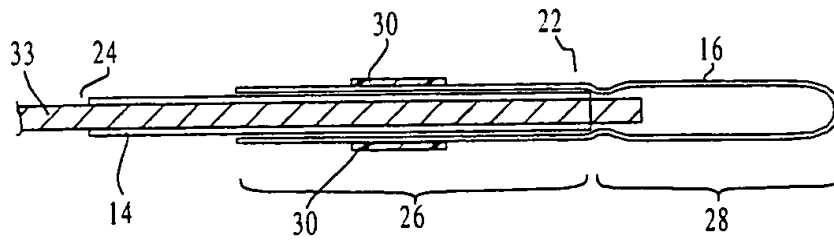


FIG. 6

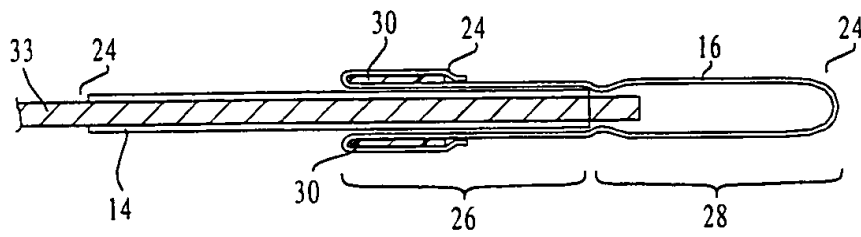


FIG. 7

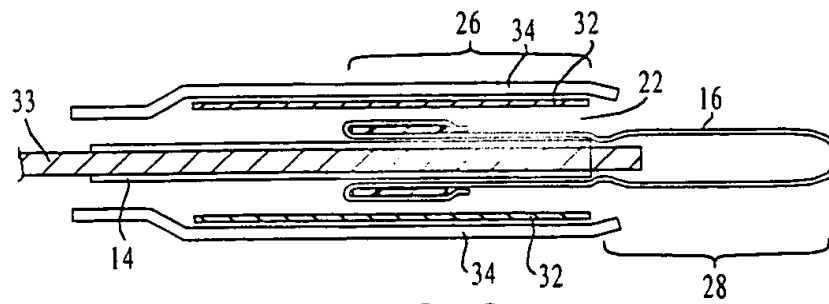


FIG. 8

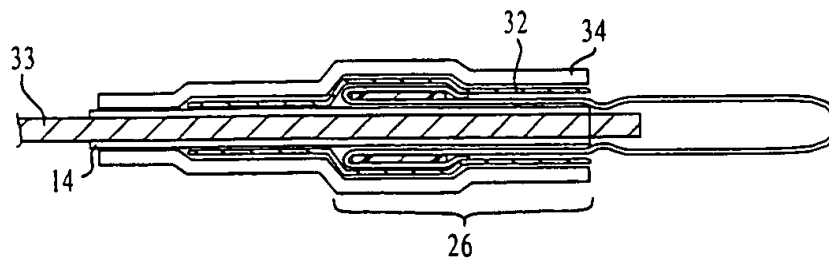


FIG. 9

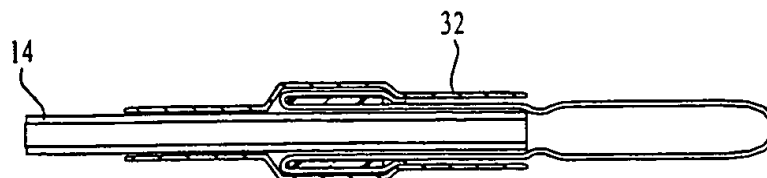


FIG. 10

# INTERNATIONAL SEARCH REPORT

Int: International Application No

PCT/US 00/11194

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M25/00 A61M25/10 A61B5/107

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M A61B G01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 4 147 169 A (TAYLOR GLENN N) 3 April 1979 (1979-04-03) the whole document	1, 3, 5, 6, 11, 13 14, 17, 18
X A	US 4 213 461 A (PEVSNER PAUL H) 22 July 1980 (1980-07-22) column 3, line 19 - column 4, line 37; figures	1-4 14, 15
A	WO 97 42871 A (CARDIOVASCULAR CONCEPTS INC) 20 November 1997 (1997-11-20) abstract; figures	1
A	WO 92 20280 A (BARD INC C R) 26 November 1992 (1992-11-26) abstract; figures	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 August 2000

Date of mailing of the international search report

29/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kousouretas, I

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/11194

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4147169 A	03-04-1979	CA 1122493 A	27-04-1982
US 4213461 A	22-07-1980	CA 1122494 A	27-04-1982
		DE 2817972 A	29-03-1979
		FR 2403083 A	13-04-1979
		GB 1603151 A	18-11-1981
		JP 3039705 B	14-06-1991
		JP 54054487 A	28-04-1979
		SE 7804664 A	16-03-1979
WO 9742871 A	20-11-1997	EP 0897285 A	24-02-1999
WO 9220280 A	26-11-1992	EP 0565648 A	20-10-1993

Form PCT/ISA/210 (patent family annex) (July 1992)

**THIS PAGE BLANK (USPTO)**

1/3

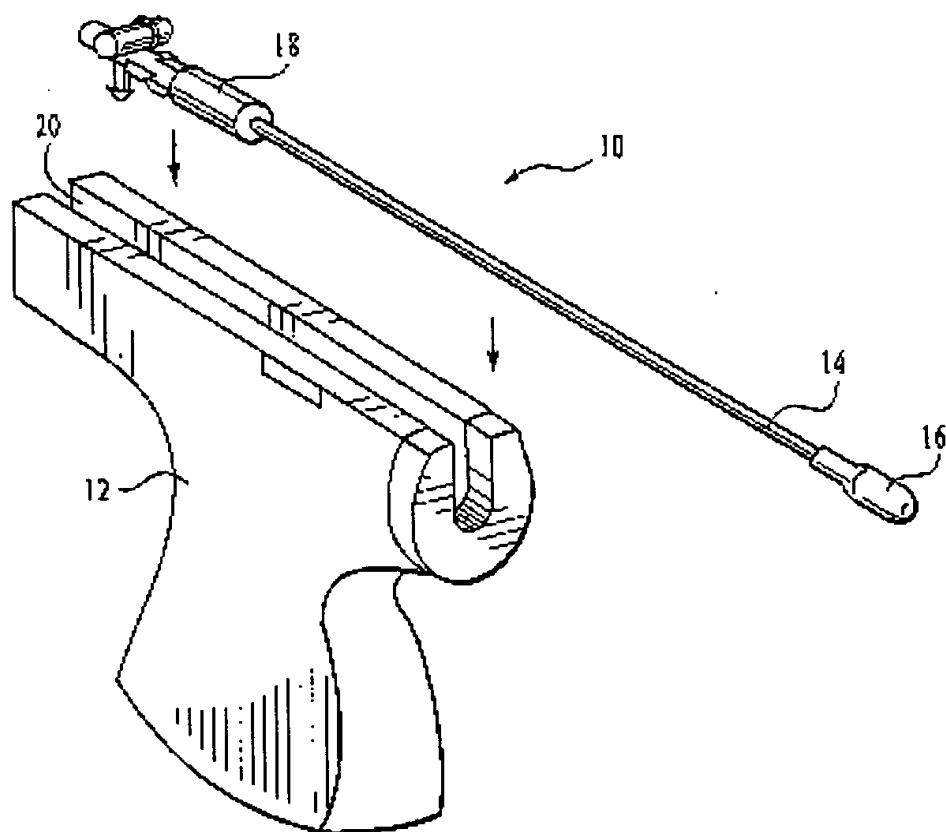


FIG. 1

2/3

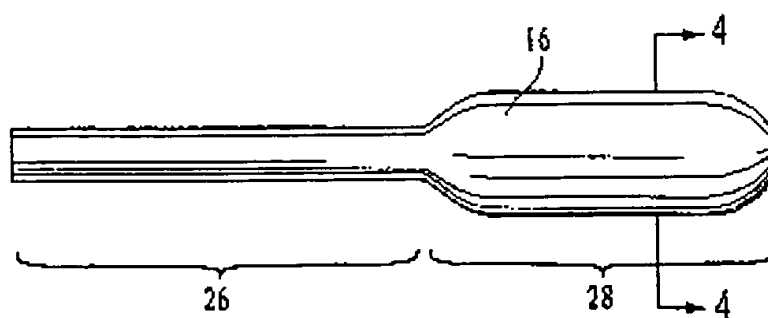
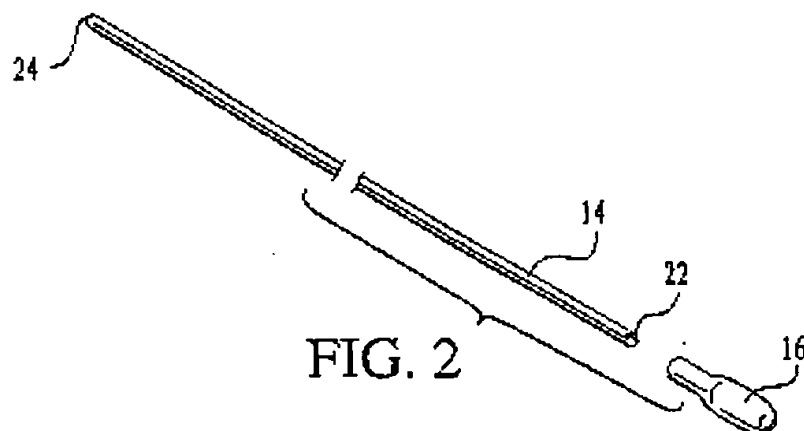
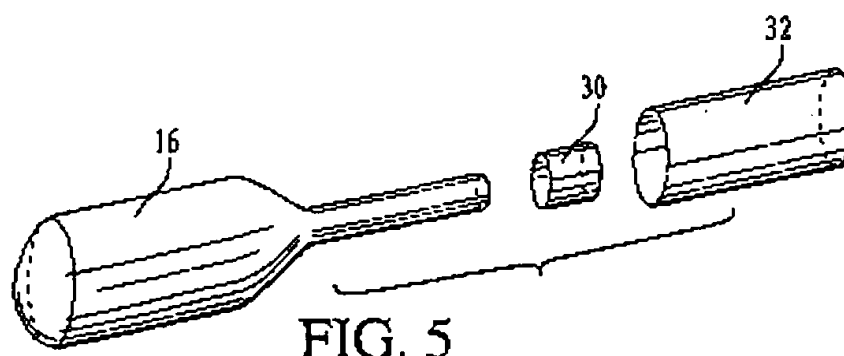


FIG. 4





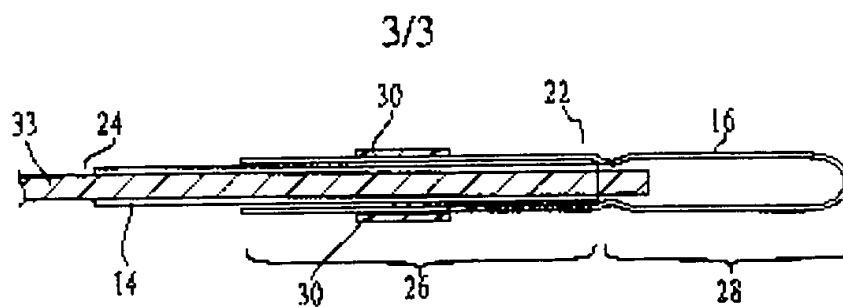


FIG. 6

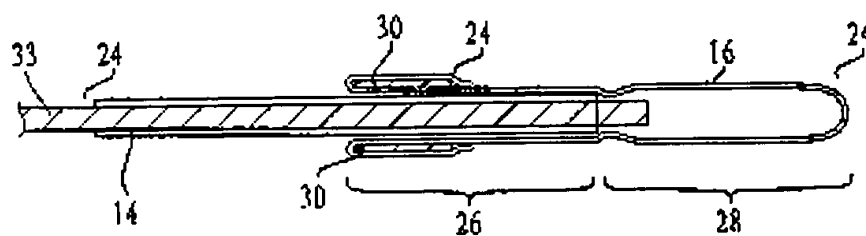


FIG. 7

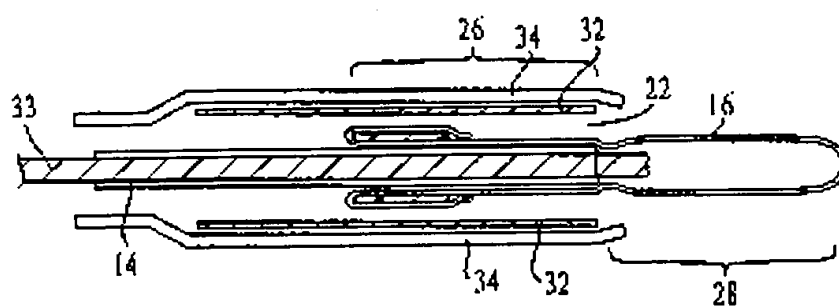


FIG. 8

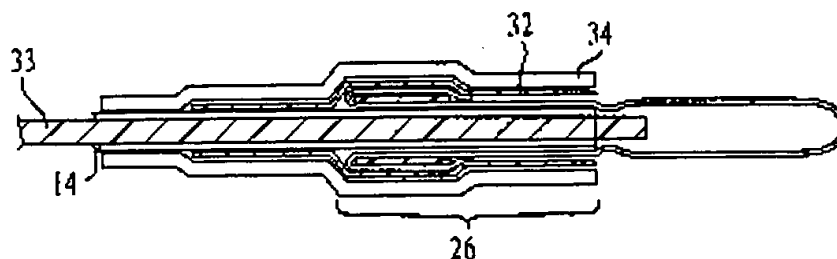


FIG. 9

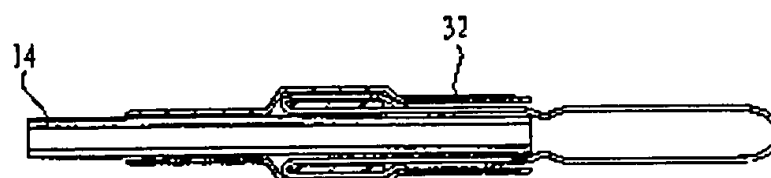


FIG. 10

**THIS PAGE BLANK (USPTO)**